


## CLIMBOO 0420H



5 - 14 years

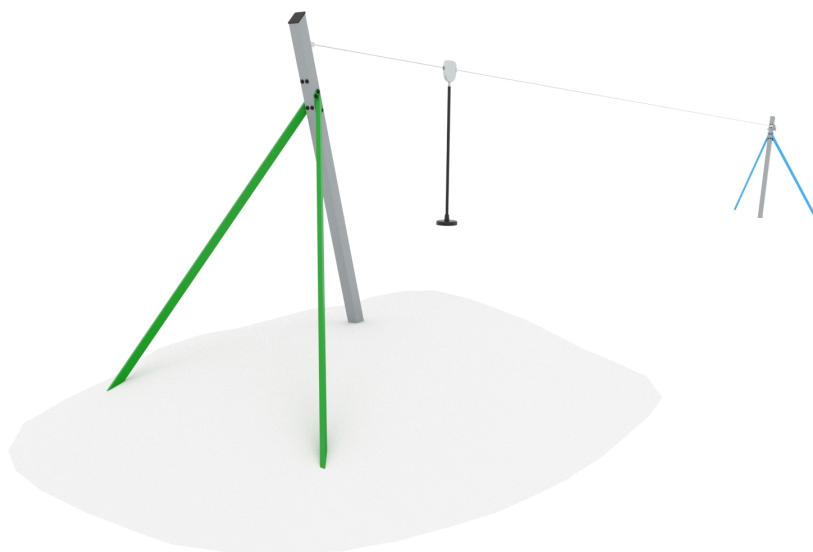

1 kids



84,4 m<sup>2</sup>

### Material specification

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel of 120 x 120 mm, 100 x 100 mm profile,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Stainless steel rope and other stringing elements,
- Screws covered with plastic caps and/or stainless steel screws,



**Physical development**





sliding





**1**

number of activity elements

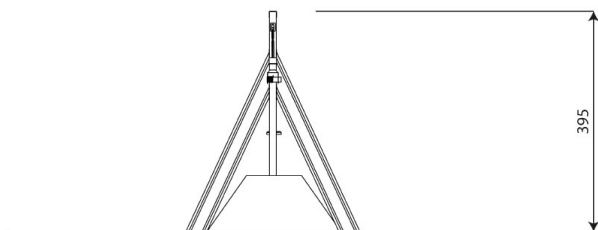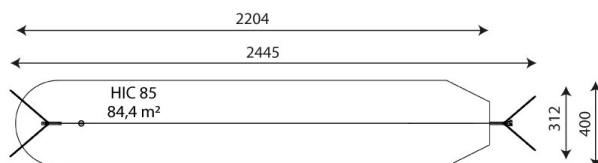

## Product technical sheet

# CLIMBOO 0420H

## Product data

|                                |                     |
|--------------------------------|---------------------|
| Length                         | 2445 cm             |
| Width                          | 312 cm              |
| Total height                   | 395 cm              |
| Age group                      | 5 - 14 years        |
| Number of users                | 1 kids              |
| Safety zone                    | 84,4 m <sup>2</sup> |
| Free fall height               | 85 cm               |
| In accordance with norm EN     | 1176-1:2017         |
| Weight of the heaviest part    | 89 kg               |
| Dimensions of the largest part | 487x12x12 cm        |
| Availability of spare parts    | YES                 |
| Installation time              | 3 h                 |
| Color options                  |                     |

Data is subject to change without prior notice.

## Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;
- other rope lengths available (30-40 m);

## Guarantee

**30**

30 year guarantee - Structural strength of steel and stainless steel components

**15**

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10**

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5**

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

**Vinci Group Sp. z o.o.**  
Seminaryjna 9 Street  
99-400 Łowicz

VAT: 534-250-14-46  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 85                        |

## Product technical sheet

# CLIMBOO 0420H

### Amount of safe surface corresponding with free fall height:

HIC 85 84,4 m<sup>2</sup>

Data is subject to change without prior notice.

