

Product technical sheet

NETTIX 1640








4 - 14 years

ars 44 kids

112,0 m²



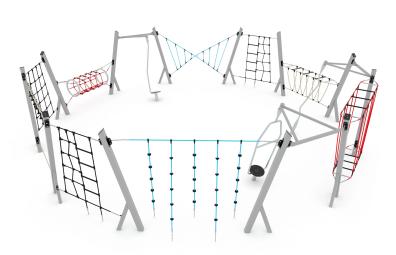

Material specification

- \bullet Hot-dip galvanized and powder coated or powder galvanized and powder coated construction of 100 x 100 mm profile,
- Stainless steel cosntruction of spinning element,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel rims,
- Stainless steel bars,
- Grips made of synthetic material,
- Rungs made of synthetic material,
- Screws covered with plastic caps and/or stainless steel screws,
- Safe end caps made of polypropylene,



Physical development



balance



pull-up



passage



climbing



crawling




spinning







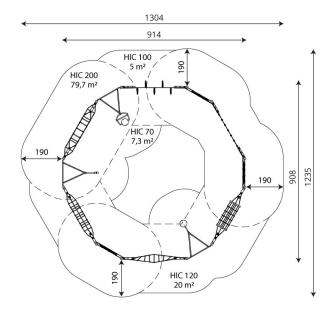





Product technical sheet

NETTIX 1640

Product data

Length	914 cm
Width	908 cm
Total height	224 cm
Age group	4 - 14 years
Number of users	44 kids
Safety zone	112,0 m2
Free fall height	200 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	27 kg
Dimensions of the largest part	300x10x10 cm
Availability of spare parts	YES
Installation time	8 h
Color options	

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee



30 year guarantee -Structural strength of steel and stainless steel components



15 year guarantee -Structural failure of steel and stainless steel, for dynamic equipment



10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components



5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



VAT: 534-250-14-46 PHONE: +48 42 203 24 99 ext. 26 M: +48 793 404 991





Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)		-	≤100
bark (A,C) Particle size from to 80	Particle size from 20	30	≤200
	to 80	40	≤300
woodchips (A,C) Particle size from 5 to 30	30	≤200	
	to 30	40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		200

Product technical sheet

NETTIX 1640

Amount of safe surface corresponding with free fall height:

HIC 70	7,3 m ²
HIC 100	5,0 m ²
HIC 120	20,0 m ²
HIC 200	79,7 m ²

Data is subject to change without prior notice.

