


## SPRING 0611-1



1 - 12 years

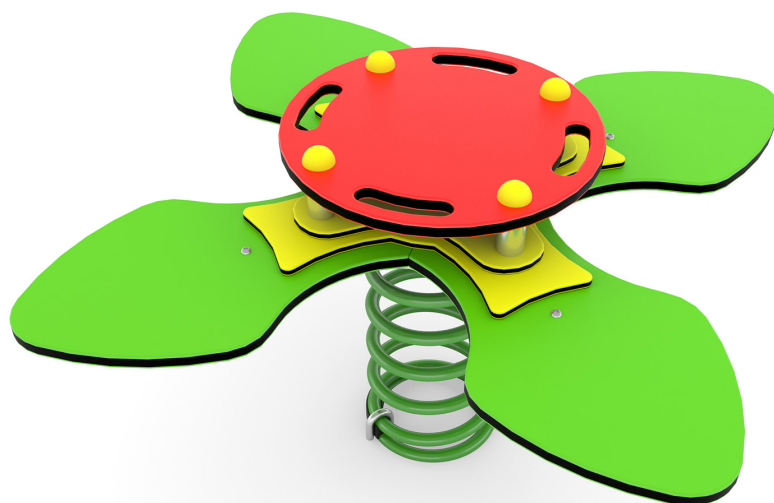

4 kids



12,5 m<sup>2</sup>

### Material specification

- Powder galvanized and powder coated steel construction,
- Elements made of durable HDPE plate, resistant to weather conditions,
- Seats made of durable HDPE plate, resistant to weather conditions,
- Steel springs 20 mm, iron phosphorated and powder coated,
- Screws covered with plastic caps and/or stainless steel screws,




**Physical development**



rocking



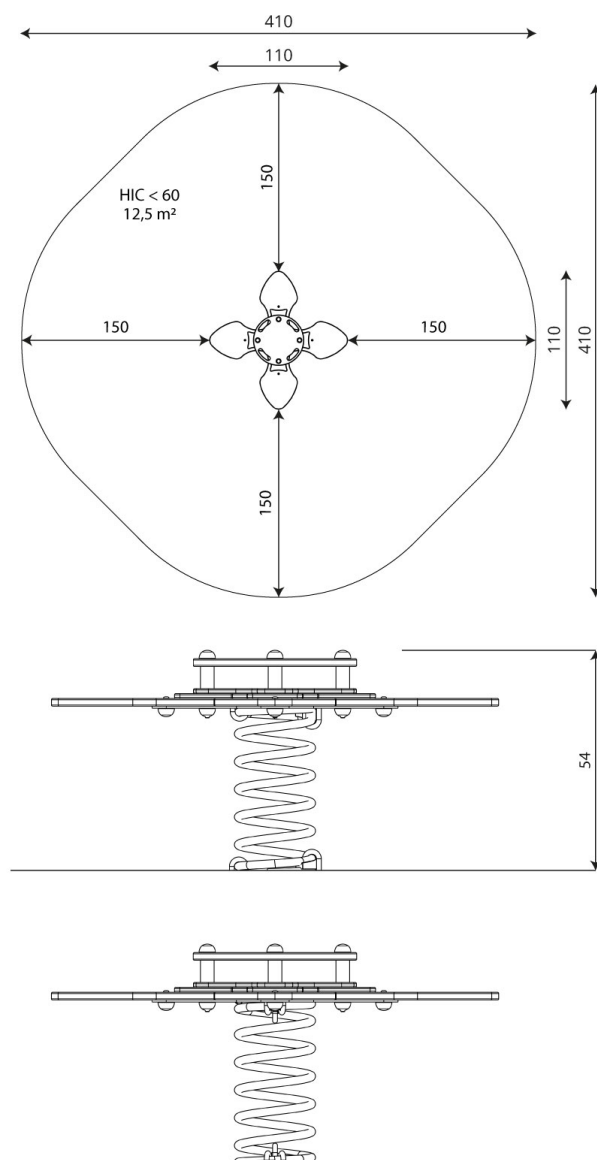

## Product technical sheet

# SPRING 0611-1

## Product data

|                                |               |
|--------------------------------|---------------|
| Length                         | 110 cm        |
| Width                          | 110 cm        |
| Total height                   | 54 cm         |
| Age group                      | 1 - 12 years  |
| Number of users                | 4 kids        |
| Safety zone                    | 12,5 m2       |
| Free fall height               | <60 cm        |
| In accordance with norm EN     | 1176-1:2017   |
| Weight of the heaviest part    | 31 kg         |
| Dimensions of the largest part | 112x94x112 cm |
| Availability of spare parts    | YES           |
| Installation time              | 1,5 h         |
| Color options                  |               |

Data is subject to change without prior notice.

## Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;

## Guarantee

**30**

30 year guarantee - Structural strength of steel and stainless steel components

**15**

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10**

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5**

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 60                        |

## Product technical sheet

# SPRING 0611-1

### Amount of safe surface corresponding with free fall height:

HIC <60 12,5 m<sup>2</sup>

Data is subject to change without prior notice.

