

#### **Product technical sheet**

## **TOPICCO 3101**








3 - 12 years

13 kids

27,9 m<sup>2</sup>

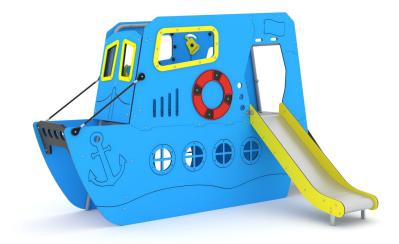



#### **Material specification**

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction,
- Platforms and climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Side panels made of durable HDPE plate, resistant to weather conditions
- Slides made of stainless steel with durable HDPE side panels,
- Moving elements made of durable HDPE plate, resistant to weather conditions,
- Rudder made of durable HDPE plate, resistant to weather conditions,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Screws covered with plastic caps and/or stainless steel screws,



#### **Facilitating disability**



easy access integration



shelters



#### Intellectual development



manipulation



thinking



#### **Physical development**



hiding



sliding



climbing



crawling










### **Product technical sheet**

## **TOPICCO 3101**


#### **Product data**

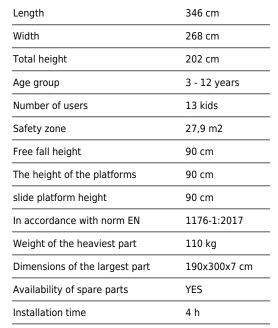



Data is subject to change without prior notice.

#### **Additional information**

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

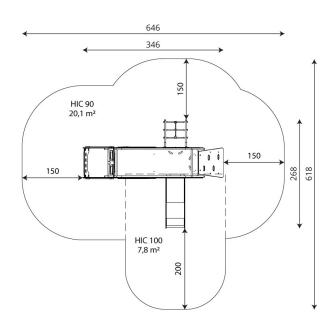

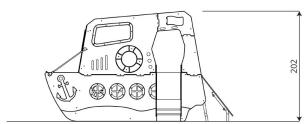

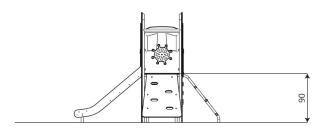

#### Guarantee



30 year guarantee -Structural strength of steel and stainless steel components



15 year guarantee -Structural failure of steel and stainless steel, for dynamic equipment



10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components



5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card





## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		100

#### **Product technical sheet**

# **TOPICCO 3101**

# Amount of safe surface corresponding with free fall height:

HIC 90	20,1 m <sup>2</sup>
HIC 100	7,8 m <sup>2</sup>

Data is subject to change without prior notice.

