

RECYCLED RC1492



1-3/3-14



8 kids



31,8 m²

R1



R2



R3



R5



R16



Material specification

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite,
- Hot-dip galvanized and powder coated or powder galvanized and powder coated or stainless steel construction elements,
- The covers are made of recycled HDPE panel, resistant to weather conditions
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,



Facilitating disability



easy access



integration



Physical development






rest



rocking



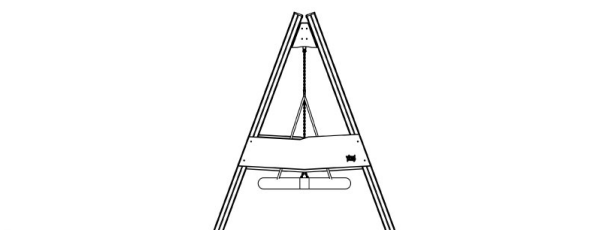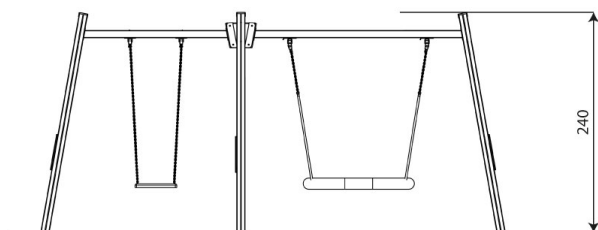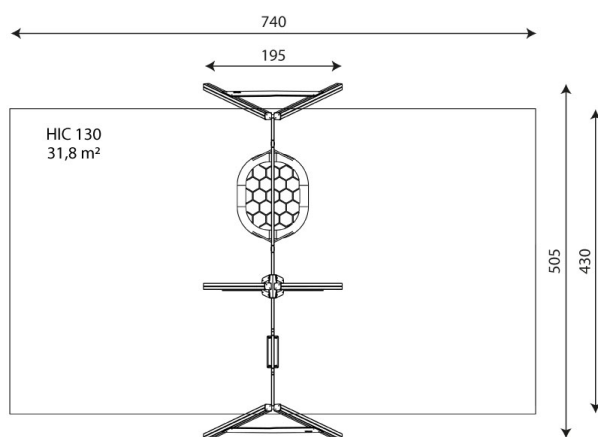

Product technical sheet

RECYCLED RC1492

Product data

| | |
|--------------------------------|----------------|
| Length | 195 cm |
| Width | 505 cm |
| Total height | 240 cm |
| Age group | 1-3/3-14 years |
| Number of users | 8 kids |
| Safety zone | 31,8 m2 |
| Free fall height | 130 cm |
| In accordance with norm EN | 1176-1:2017 |
| Weight of the heaviest part | 15 kg |
| Dimensions of the largest part | 300x9x9 cm |
| Availability of spare parts | YES |
| Installation time | 2 h |

Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- available types of seats in the swing: R1-flat, R2-basket, R3-flat belt, R5-flat with barrier;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

30

30 year guarantee - Structural strength of steel and stainless steel components

15

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

10

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

5

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017

| | Description (mm) | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | - | - | ≤100 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤200 |
| | | 40 | ≤300 |
| woodchips (A,C) | Particle size from 5 to 30 | 30 | ≤200 |
| | | 40 | ≤300 |
| sand or gravel (A,C) | Particle size from 0,25 to 8 | 30 | ≤200 |
| | | 40 | ≤300 |
| synthetic attested (A,B,C) | Tested according to EN 1177 | | 130 |

Product technical sheet

RECYCLED RC1492

Amount of safe surface corresponding with free fall height:

HIC 130 31,8 m²

Data is subject to change without prior notice.

