


SPRING 0619



3 - 14 years

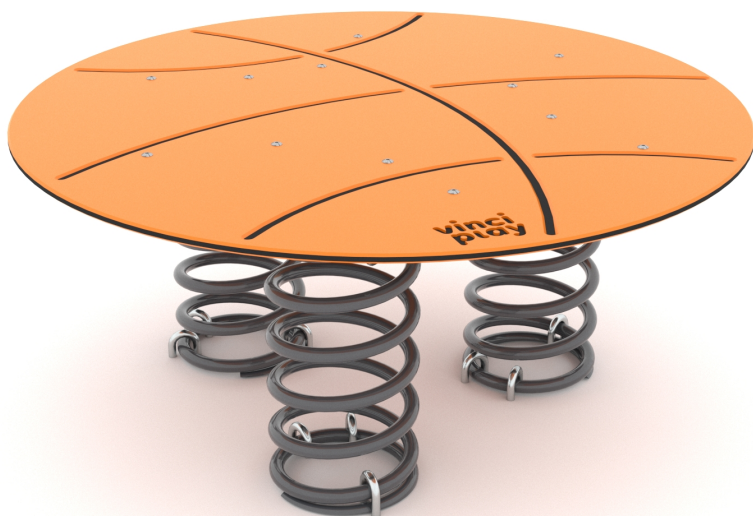

3 kids



12.6 m²

Material specification

- Powder galvanized and powder coated steel construction,
- Platform made of durable HDPE plate, resistant to weather conditions,
- Steel springs 20 mm, iron phosphorated and powder coated,
- Screws covered with plastic caps and/or stainless steel screws,



Physical development




balance



rocking



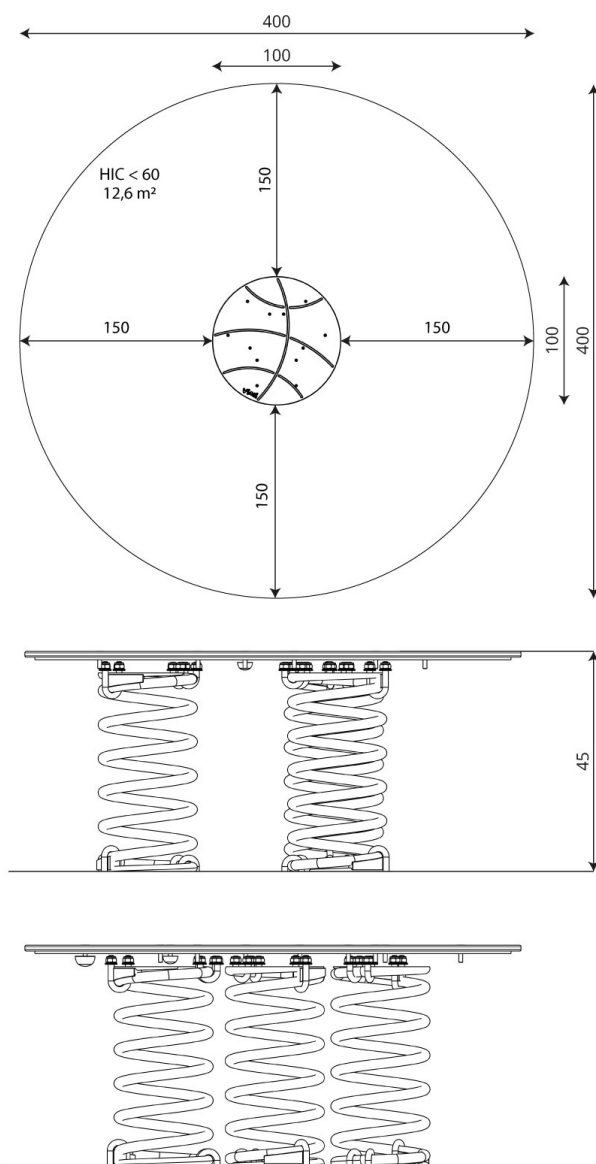

Product technical sheet

SPRING 0619

Product data

Length	100 cm
Width	100 cm
Total height	45 cm
Age group	3 - 14 years
Number of users	3 kids
Safety zone	12.6 m2
Free fall height	<60 cm
The height of the platforms	45 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	29 kg
Dimensions of the largest part	100x100x2 cm
Availability of spare parts	YES
Installation time	1,0 h
Color options	

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jinning the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

30

30 year guarantee -
Structural strength of steel
and stainless steel
components

15

15 year guarantee -
Structural failure of steel
and stainless steel, for
dynamic equipment

10

10 year guarantee - Structural
failure of high density
polyethylene and high
pressure laminates
components

5

5 year guarantee - Corrosion of stainless
steel and hot dip galvanized and powder
coated components; against bark beetles
and rot in case of wooden structural
elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		60

Product technical sheet

SPRING 0619

Amount of safe surface corresponding with free fall height:

HIC <60 12,6 m²

Data is subject to change without prior notice.

