


SWING ST0516



1-3/3-14

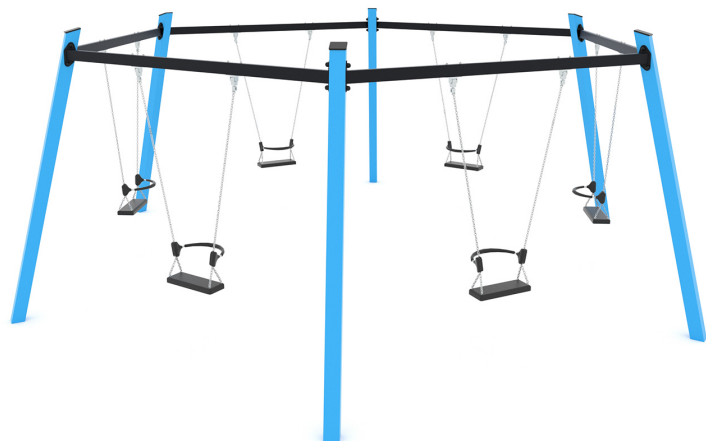

6 kids



54,5 m²

R2



R5



Material specification

- Hot-dip galvanized and powder coated or powder galvanized and powder coated construction of 100 x 100 mm profile,
- Hot-dip galvanized and powder coated or powder galvanized and powder coated or stainless steel construction elements,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps on the top of the bar, made of durable HDPE plate, resistant to weather conditions,






Physical development



rocking



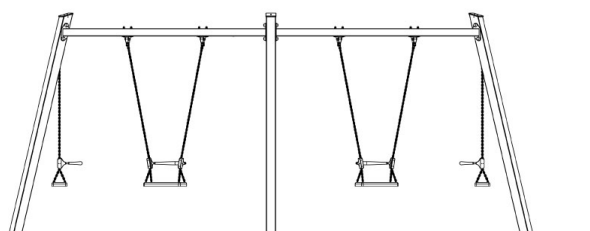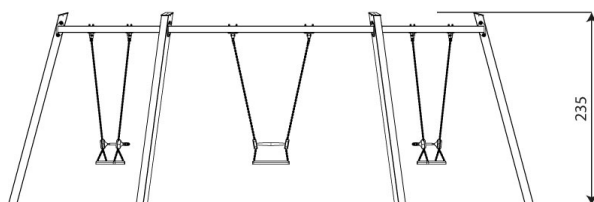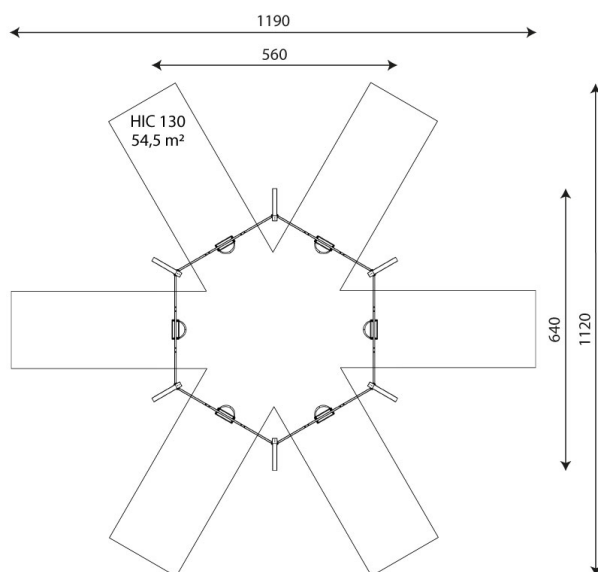

Product technical sheet

SWING ST0516

Product data

Length	560 cm
Width	640 cm
Total height	235 cm
Age group	1-3/3-14 years
Number of users	6 kids
Safety zone	54,5 m2
Free fall height	130 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	18 kg
Dimensions of the largest part	310x10x10 cm
Availability of spare parts	YES
Installation time	4 h

Color options



Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- available types of seats in the swing: R2-basket, R5-flat with barrier;
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

30

30 year guarantee -
Structural strength of steel
and stainless steel
components

15

15 year guarantee -
Structural failure of steel
and stainless steel, for
dynamic equipment

10

10 year guarantee - Structural
failure of high density
polyethylene and high
pressure laminates
components

5

5 year guarantee - Corrosion of stainless
steel and hot dip galvanized and powder
coated components; against bark beetles
and rot in case of wooden structural
elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		130

Product technical sheet

SWING ST0516

Amount of safe surface corresponding with free fall height:

HIC 130 54,5 m²

Data is subject to change without prior notice.

