

## SWING WD1424-1



1-3/3-14



4 kids



43,7 m<sup>2</sup>

R1



R2



R3



R5



R16



### Material specification

- Construction made of the highest quality laminated, impregnated and double coated pine wood 90 x 90 mm without knots, secured from the top with polypropylene plugs,
- Metal anchors made of hot dip galvanized steel, protecting the wood from direct contact with the ground to prevent rot and to extend the product's life,
- Hot-dip galvanized and powder coated or powder galvanized and powder coated or stainless steel construction elements,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,




**Physical development**



rocking



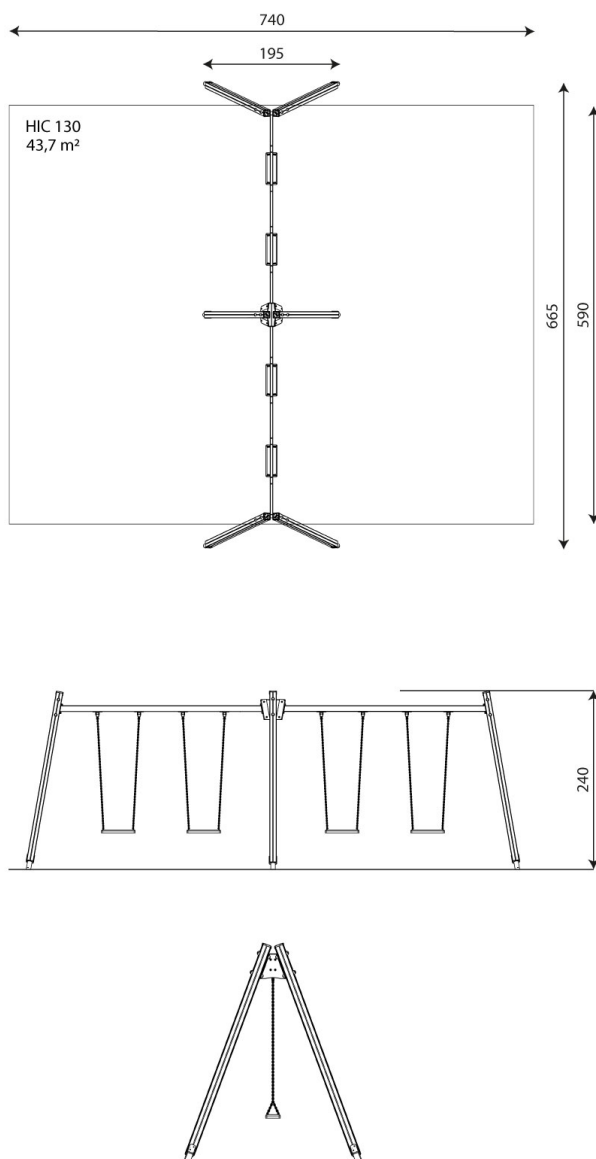

## Product technical sheet

# SWING WD1424-1

## Product data

|                                |                |
|--------------------------------|----------------|
| Length                         | 195 cm         |
| Width                          | 665 cm         |
| Total height                   | 240 cm         |
| Age group                      | 1-3/3-14 years |
| Number of users                | 4 kids         |
| Safety zone                    | 43,7 m2        |
| Free fall height               | 130 cm         |
| In accordance with norm EN     | 1176-1:2017    |
| Weight of the heaviest part    | 25 kg          |
| Dimensions of the largest part | 302x9x9 cm     |
| Availability of spare parts    | YES            |
| Installation time              | 2 h            |
| Color options                  |                |

Data is subject to change without prior notice.

## Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- available types of seats in the swing: R1-flat, R2-basket, R3-flat belt, R5-flat with barrier;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

|           |                                                                                 |           |                                                                                            |           |                                                                                                            |          |                                                                                                                                                                         |
|-----------|---------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>30</b> | 30 year guarantee - Structural strength of steel and stainless steel components | <b>15</b> | 15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment | <b>10</b> | 10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components | <b>5</b> | 5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements |
|-----------|---------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 130                       |

## Product technical sheet

# SWING WD1424-1

### Amount of safe surface corresponding with free fall height:

HIC 130 43,7 m<sup>2</sup>

Data is subject to change without prior notice.

