

WORKOUT 2329



14+



< 140 kg





129,1 m2

Length	1137 cm
Width	789 cm
Total height	351 cm
Age group	14+ years
Maximum weight of user	140 kg
Safety zone	129,1 m2
Free fall height	249 cm
In accordance with norm EN	16630:2015
Weight of the heaviest part	38 kg
Dimensions of the largest part	10x10x460 cm
Availability of spare parts	YES
Installation time	10 h
Color options	

Figure 1: Plan view of the building layout showing the distribution of the 12 HICs. The layout is a complex, irregular shape with various rooms and corridors. Dimensions are given in meters. The total width is 1487m and the total height is 789m. The layout is divided into several sections by dashed lines. The HICs are labeled with their number and area in square meters. The layout includes a central staircase area, a large central hall, and several smaller rooms and corridors. The layout is shown in a plan view with dimensions and HIC labels.

HIC	Area (m²)
HIC <60	8.2
HIC 141	14.0
HIC 180	15.4
HIC 160	4.2
HIC 249	44.0
HIC 92	15.0
HIC 230	19.2
HIC 112	5.9
HIC 249	22.0
HIC 130	3.0
HIC 92	5.6
HIC 72	9.6
HIC 230	129.1

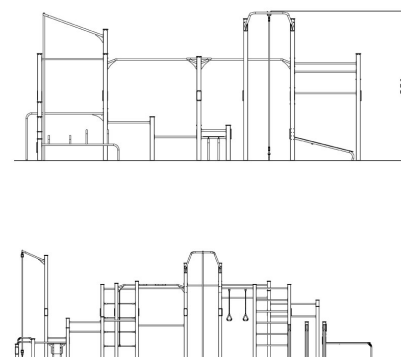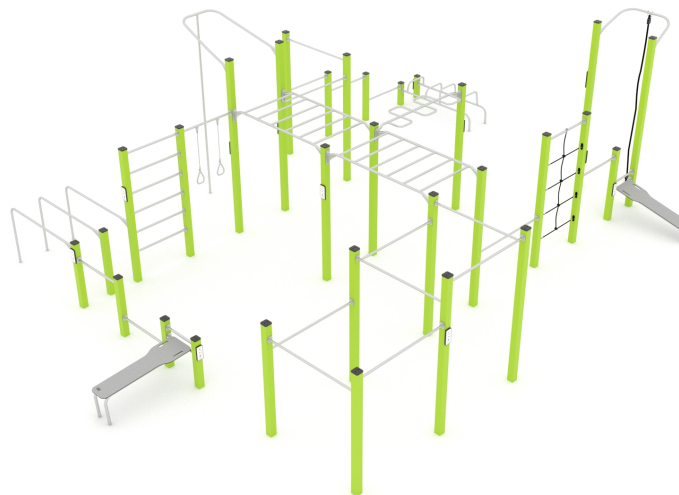


Material specification



Powder galvanized and powder-coated or stainless steel construction of 100 x 100 mm profile, durable end caps on the top of the structure made of plastic,



Aluminum exercise instructions plate screwed to HDPE plate, resistant to weather conditions,



Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,



Steel rope in polypropylene braid,




Seats/backrests made of durable HPL plate, resistant to weather conditions,



Stainless steel bars with a diameter of 38 mm for a comfortable grip during exercises.



Certified handles and calibrated chains made of stainless steel, preventing fingers from getting caught,



Stainless steel screws and/or screws covered with plastic caps,

Additional information

- equipment adapted for the disabled; device intended for public outdoor gyms;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 100 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

- 30** 30 year guarantee - Structural strength of steel and stainless steel components
- 15** 15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment
- 10** 10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components
- 5** 5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

Vinci Group Sp. z o.o.
Seminaryjna 9 Street
99-400 Łowicz

VAT: 534-250-14-46
PHONE: +48 42 203 24 99 ext. 26
M: +48 793 404 991

workout

biuro@vinci-play.com
info@vinci-play.com
www.vinci-play.com

Amount of safe surface corresponding with free fall height:

HIC <60	8,2 m ²
HIC 72	9,6 m ²
HIC 92	5,6 m ²
HIC 112	5,9 m ²
HIC 130	3,0 m ²
HIC 141	14,0 m ²
HIC 160	4,2 m ²
HIC 180	15,4 m ²
HIC 230	19,2 m ²
HIC 249	44,0 m ²

Data is subject to change without prior notice.

Surfaces according to EN 16630:2015

	Description (mm)	Layer thickness (cm)	Maximum fall height (cm)
Concrete / stone / bituminous surfaces (A, B, C)	-	-	≤100
outer soil layer (A,B,C)	-	-	≤120
Turf (A,B,C)	-	-	≤150
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
wood shavings/cuttings (A, C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand (A,C)	Particle size from 0,2 to 2 mm	30	≤200
		40	≤300
gravel (A,C)	Particle size from 2 to 8	30	≤200
		40	≤300
attested synthetic (A, B, C)	Tested according to EN 1177		249

