

ROBINIA RB1305



3 - 14 years



6 kids



35,6 m²

R1



R2



R3



R5L



R16



Material specification

- Construction made of Robinia - very durable acacia wood with a diameter of ~ 18 cm without sharp edges, resistant to weather conditions,
- Hot-dip galvanized steel construction,
- Platforms made of Robinia - very durable acacia wood, resistant to weather conditions,
- Side panels made of Robinia - very durable acacia wood without sharp edges, resistant to weather conditions
- Slides made of stainless steel,
- Steel ropes in polypropylene braid, connected with durable aluminum, stainless steel and/or plastic elements,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,
- Stainless steel screws,



Physical development



sliding



rocking



climbing





1
number of
towers



1
number of
slides



1
number of activity
elements

Product technical sheet

ROBINIA RB1305


Product data

Length	605 cm
Width	292 cm
Total height	250 cm
Age group	3 - 14 years
Number of users	6 kids
Safety zone	35,6 m ²
Free fall height	130 cm
The height of the platforms	120 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	69 kg
Dimensions of the largest part	300x18x18 cm
Availability of spare parts	YES
Installation time	8,0 h

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

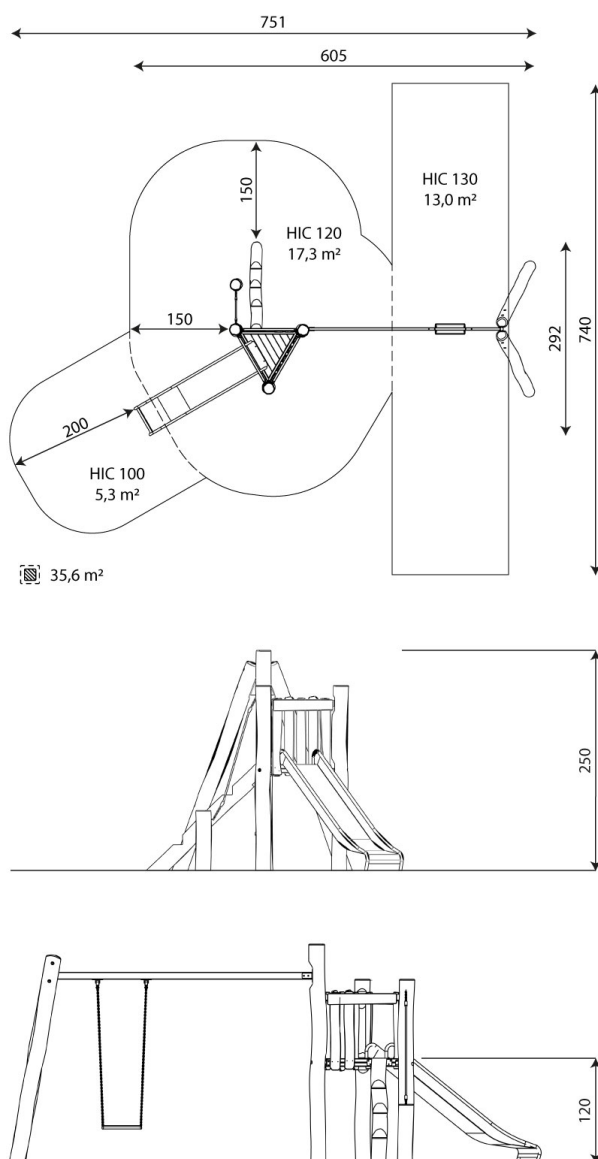

Guarantee

30

30 year guarantee -
Structural strength of steel
and stainless steel
components

15

15 year guarantee -
Structural failure of steel
and stainless steel, for
dynamic equipment

10

10 year guarantee - Structural
failure of high density
polyethylene and high
pressure laminates
components

5

5 year guarantee - Corrosion of stainless
steel and hot dip galvanized and powder
coated components; against bark beetles
and rot in case of wooden structural
elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		130

Product technical sheet

ROBINIA RB1305

Amount of safe surface corresponding with free fall height:

HIC 100 5,3 m²

HIC 120 17,3 m²

HIC 130 13,0 m²

Data is subject to change without prior notice.

