

Product technical sheet

CROOC 0306







Material specification


- Stainless steel structure of 80 x 80 mm profile,
- Platforms, climbing walls and steps made of durable anti-slip and waterproof HPL plate,
- Roofs and side panels and seats made of durable HPL plate, resistant to weather conditions,
- Slides made of stainless steel with durable HPL side panels,
- Moving elements made of durable HPL plate, resistant to weather conditions,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Stainless steel bars,
- Screws covered with plastic caps and/or stainless steel screws,
- Safe end caps on top of the structure made of rubber or polypropylene,





VAT: 534-265-18-84 PHONE: +48 42 203 24 99 ext. 26 M: +48 793 404 991




biuro@vinci-play.com info@vinci-play.com www.vinci-play.com

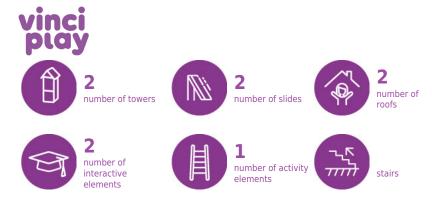







15 year guarantee - Durability

structures of mobile devices;

0

HDPE and HPL elements;

100% recycled material

(composite)

structural elements made of

of steel and stainless steel

durability of Robinia wood

structural elements

Guarantee



30 year guarantee -Durability of steel and 15 stainless steel structural elements

Detailed information in the guarantee card

Vinci Sp. z o.o. Seminaryjna 9 Street 99-400 Łowicz

VAT: 534-265-18-84 PHONE: +48 42 203 24 99 ext. 26 M: +48 793 404 991

Product technical sheet CROOC 0306


Product data

Length	400 cm	
Width	322 cm	
Total height	284 cm	
Age group	3 - 12 years	
Number of users	16 kids	
Safety zone	32,3 m2	
Free fall height	120 cm	
The height of the platforms	90, 120 cm	
In accordance with norm EN	1176-1:2017+A1:2023	
Weight of the heaviest part	38 kg	
Dimensions of the largest part	305x8x8 cm	
Availability of spare parts	YES	
Installation time	6,0 h	
Color options		

Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for . public playgrounds;
- equipment has a certificate issued by an accredited • entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of • jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep; •
- slide should not be installed southwards; •
- render is for reference only, the actual appearance of the equipment and its color may vary;



5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com

2/3



Surfaces according to EN 1176-1:2017+A1:2023


	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C) Pari	Particle size from 20	30	≤200
	to 80	40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		120

Product technical sheet CROOC 0306

Amount of safe surface corresponding with free fall height:

HIC 90	6,2 m²
HIC 100	9,0 m ²
HIC 120	17,1 m ²

Data is subject to change without prior notice.

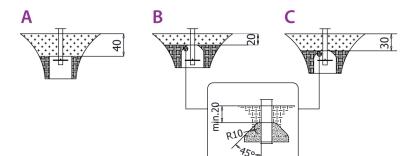

Vinci Sp. z o.o. Seminaryjna 9 Street 99-400 Łowicz VAT: 534-265-18-84 PHONE: +48 42 203 24 99 ext. 26 M: +48 793 404 991



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com