

# CROOC 0330




5 - 14 years



110 kids



100,9 m<sup>2</sup>

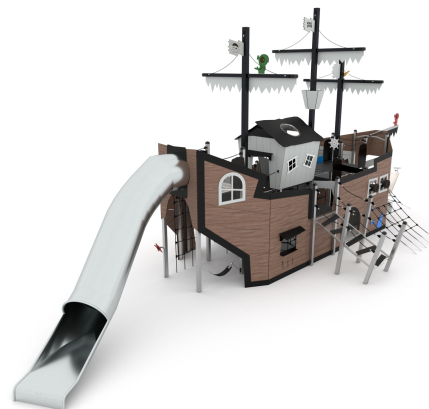

## Material specification

- Stainless steel and hot-dip galvanized and powder coated steel construction of 80x80 mm profile,
- Platforms and climbing walls made of durable anti-slip and waterproof HPL plate,
- Roofs and side panels and seats made of durable HPL plate, resistant to weather conditions,
- Stainless steel tube slide,
- Moving elements made of durable HPL plate, resistant to weather conditions,
- Windows and/or elements made of polycarbonate,
- Spherical windows made of polycarbonate,
- Telescope made of stainless steel and durable HDPE plate, resistant to weather conditions,
- Flags / sails made of durable HPL plate, resistant to weather conditions,
- Rudder made of durable HDPE plate, resistant to weather conditions,
- "Telephone" - construction - stainless steel pipe, flowers made of HPL plates; plastic underground installation,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Ladders made of steel ropes in polypropylene braid and rungs made of synthetic material,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel bars and handrails,
- Screws covered with plastic caps and/or stainless steel screws,
- Safe end caps on top of the structure made of rubber or polypropylene,



### Facilitating disability



easy access



integration



### Intellectual development



manipulation



music



sight



thinking



### Physical development



hiding



sliding



rest



climbing



rocking





**1**

number of slides



**1**

number of roofs





**28**

number of interactive elements



**10**

number of activity elements

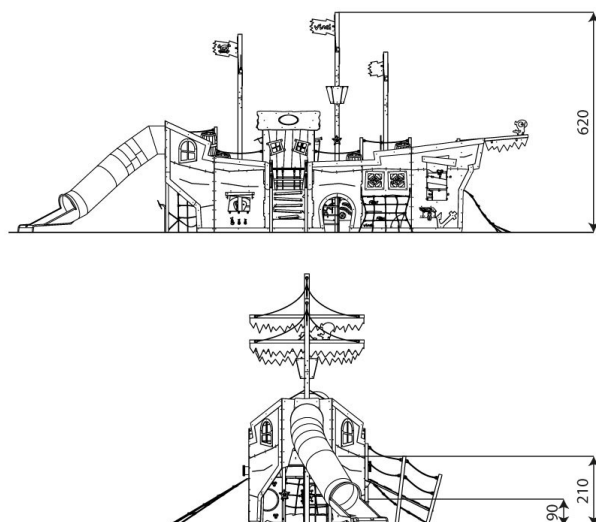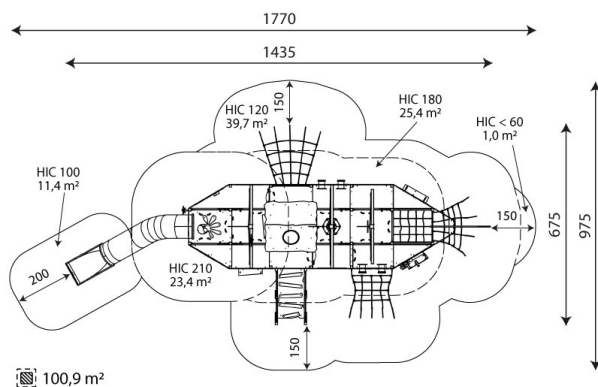

## Product technical sheet

# CROOC 0330

## Product data

Length	1435 cm
Width	675 cm
Total height	620 cm
Age group	5 - 14 years
Number of users	110 kids
Safety zone	100,9 m <sup>2</sup>
Free fall height	210 cm
The height of the platforms	90, 110, 120, 150, 180, 210 cm
tube slide platform height	210 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	48 kg
Dimensions of the largest part	370x8x8 cm
Availability of spare parts	YES
Installation time	35 h

Data is subject to change without prior notice.

## Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- anchoring on flat surface, 100 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

**30**

30 year guarantee - Structural strength of steel and stainless steel components

**15**

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10**

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5**

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

**Vinci Group Sp. z o.o.**  
Seminarnyja 9 Street  
99-400 Łowicz

VAT: 534-250-14-46  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		210

## Product technical sheet

### CROOC 0330

#### Amount of safe surface corresponding with free fall height:

HIC <60	1,0 m <sup>2</sup>
HIC 100	11,4 m <sup>2</sup>
HIC 120	39,7 m <sup>2</sup>
HIC 180	25,4 m <sup>2</sup>
HIC 210	23,4 m <sup>2</sup>

Data is subject to change without prior notice.

