

#### **Product technical sheet**

# **RECYCLED RC0671**








3 - 12 years

8 kids

16,0 m<sup>2</sup>

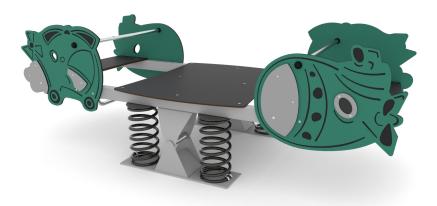

### **Material specification**

- Hot-dip galvanized and powder coated steel construction,
- The covers are made of recycled HDPE panel, resistant to weather conditions
- Seats/backrests made of recycled HDPE boards resistant to weather conditions, green HDPE panels made of 100% recycled materials, e.g. ocean waste such as fishing nets and ropes,
- Steel springs 20 mm, iron phosphorated and powder coated,
- Stainless steel bars,
- Screws covered with plastic caps and/or stainless steel screws,





**Physical development** 











#### **Product technical sheet**

## **RECYCLED RC0671**

#### **Product data**

Length	260 cm	
Width	116 cm	
Total height	89 cm	
Age group	3 - 12 years	
Number of users	8 kids	
Safety zone	16,0 m2	
Free fall height	<60 cm	
In accordance with norm EN	1176-1:2017	
Weight of the heaviest part	13 kg	
Dimensions of the largest part	239x6x6 cm	
Availability of spare parts	YES	
Installation time	4 h	

Data is subject to change without prior notice.

#### **Additional information**

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

#### **Guarantee**



30 year guarantee -Structural strength of steel and stainless steel components



15 year guarantee -Structural failure of steel and stainless steel, for dynamic equipment



10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components



5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



M: +48 793 404 991



99-400 Łowicz

Vinci Group Sp. z o.o.

Seminaryjna 9 Street



## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
hark (A.C.)	Particle size from 20	30 m 20	≤200
bark (A,C)	to 80	40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
cand or gravel (A.C.)	and or gravel (A,C)  Particle size from 0,25 to 8  40	≤200	
Sand of graver (A,C)		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		60

### **Product technical sheet**

# **RECYCLED RC0671**

**Amount of safe surface** corresponding with free fall height:

HIC < 60 16,0 m<sup>2</sup>

Data is subject to change without prior notice.

