



## Product technical sheet

# ROBINIA RB1211



3+



10 kids



32,2 m²



## Material specification

- Construction made of Robinia - very durable acacia wood with a diameter of ~ 18 cm without sharp edges, resistant to weather conditions,
- Platforms made of Robinia - very durable acacia wood, resistant to weather conditions,
- Roofs made of Robinia - very durable acacia wood without sharp edges, resistant to weather conditions
- Side panels made of Robinia - very durable acacia wood without sharp edges, resistant to weather conditions
- Slides made of stainless steel,
- Fireman's pole made of stainless steel,
- Windows made of HPL plate resistant to weather conditions,
- Steel ropes in polypropylene braid, connected with durable aluminum, stainless steel and/or plastic elements,
- Rubber hammock with textile reinforcement,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Handles made of steel rope in polypropylene braid,
- Screws covered with plastic caps and/or stainless steel screws,



### Facilitating disability



easy access



integration



### Physical development



sliding



rest



climbing



rocking





**1**  
number of towers






**1**  
number of slides



**1**  
number of roofs



**2**  
number of activity elements

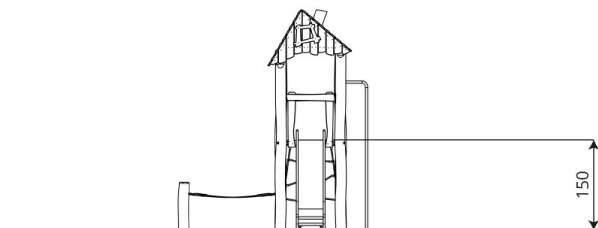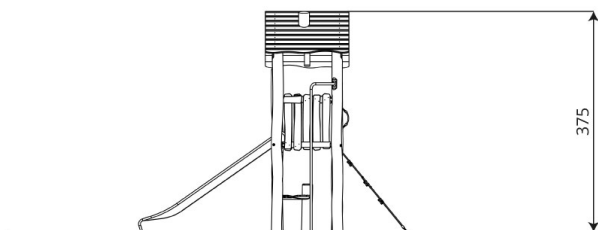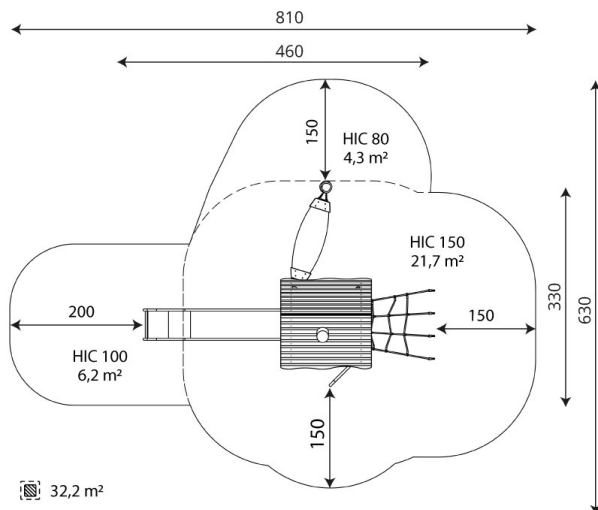

## Product technical sheet

# ROBINIA RB1211

## Product data

|                                |              |
|--------------------------------|--------------|
| Length                         | 460 cm       |
| Width                          | 330 cm       |
| Total height                   | 375 cm       |
| Age group                      | 3+ years     |
| Number of users                | 10 kids      |
| Safety zone                    | 32,2 m2      |
| Free fall height               | 150 cm       |
| The height of the platforms    | 150 cm       |
| In accordance with norm EN     | 1176-1:2017  |
| Weight of the heaviest part    | 95 kg        |
| Dimensions of the largest part | 310x18x18 cm |
| Availability of spare parts    | YES          |
| Installation time              | 4,5 h        |

Data is subject to change without prior notice.

## Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 100 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

**30**

30 year guarantee - Structural strength of steel and stainless steel components

**15**

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10**

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5**

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

**Vinci Group Sp. z o.o.**  
Seminarnyja 9 Street  
99-400 Łowicz

VAT: 534-250-14-46  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 150                       |

## Product technical sheet

# ROBINIA RB1211

### Amount of safe surface corresponding with free fall height:

HIC 80 4,3 m<sup>2</sup>

HIC 100 6,2 m<sup>2</sup>

HIC 150 21,7 m<sup>2</sup>

Data is subject to change without prior notice.

