Product technical sheet

WORKOUT 2306









14+

< 140 kg


g 14,6 m²

Product data

| Length | 158 cm | |
|--------------------------------|-------------|--|
| Width | 82 cm | |
| Total height | 83 cm | |
| Age group | 14+ years | |
| Maximum weight of user | 140 kg | |
| Safety zone | 14,6 m2 | |
| Free fall height | <60 cm | |
| In accordance with norm EN | 16630:2015 | |
| Weight of the heaviest part | 16 kg | |
| Dimensions of the largest part | 170x4x55 cm | |
| Availability of spare parts | YES | |
| Installation time | 1,5 h | |
| Color options | | |

Data is subject to change without prior notice.



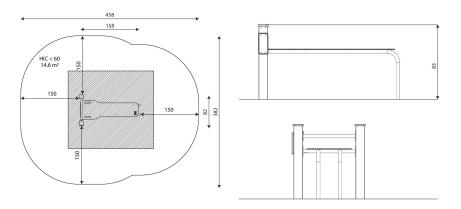









VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991



Material specification



Powder galvanized and powder-coated or stainless steel construction of 100×100 mm profile, dulrable end caps on the top of the structure made of plastic,



Aluminum exercise instructions plate screwed to HDPE plate, resistant to weather conditions,



Seats/backrests made of durable HPL plate, resistant to weather conditions,



Stainless steel bars with a diameter of 38 mm for a comfortable grip during exercises.



Stainless steel screws and/or screws covered with plastic caps,

Vinci Group Sp. z o.o. Seminaryjna 9 Street 99-400 Łowicz

VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991

equipment adapted for the disabled; device intended for public outdoor gyms;

Additional information

- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

- 30 year guarantee Structural strength of steel and stainless steel components
- 15 year guarantee Structural failure of steel and stainless steel, for dynamic equipment
- 10 year guarantee Structural failure of high density polyethylene and high pressure laminates components
- 5 year guarantee Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com

Amount of safe surface corresponding with free fall height:


| Н | < h(| |
|---|------|--|
| | | |
| | | |

14,6 m²

Data is subject to change without prior notice.

Surfaces according to EN 16630:2015

| | Description (mm) | Layer thickness (cm) | Maximum fall height (cm) |
|---|-----------------------------------|-------------------------|-----------------------------|
| Concrete / stone / bituminous surfaces (A, B, C) | - | - | ≤100 |
| outer soil layer (A,B,C) | - | - | ≤120 |
| Turf (A,B,C) | - | - | ≤150 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤200 |
| | | 40 | ≤300 |
| wood shavings/cuttings (A, C) | Particle size from 5 to 30 | 30 | ≤200 |
| wood snavings/cuttings (A, C) | | 40 | ≤300 |
| sand (A,C) | Particle size from 0,2 to 2 mm | 30 | ≤200 |
| | | 40 | ≤300 |
| gravel (A,C) | Particle size from 2 to 8 | 30 | ≤200 |
| | 1 di dicie 5/20 110111 2 10 0 | 40 | ≤300 |
| attested synthetic (A, B, C) | Tested according to EN 1177 | | 60 |





VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com