#### **Product technical sheet**

## **WORKOUT 2308**







14+

< 140 kg


24,5 m2

#### **Product data**

Length	234 cm
Width	12 cm
Total height	241 cm
Age group	14+ years
Maximum weight of user	140 kg
Safety zone	24,5 m2
Free fall height	231 cm
In accordance with norm EN	16630:2015
Weight of the heaviest part	32 kg
Dimensions of the largest part	10x10x350 cm
Availability of spare parts	YES
Installation time	1 h
Color options	

Data is subject to change without prior notice.



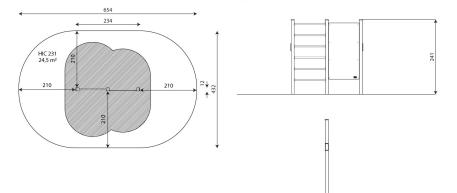









VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991



#### **Material specification**



Powder galvanized and powder-coated or stainless steel construction of  $100 \times 100$  mm profile, dulrable end caps on the top of the structure made of plastic,



Aluminum exercise instructions plate screwed to HDPE plate, resistant to weather conditions,



Exercise wall made of durable HPL plate, resistant to weather conditions,



Stainless steel bars with a diameter of 38 mm for a comfortable grip during exercises.



Stainless steel screws and/or screws covered with plastic caps,

#### Vinci Group Sp. z o.o. Seminaryjna 9 Street 99-400 Łowicz

VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991

## Additional information

- equipment adapted for the disabled; device intended for public outdoor gyms;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 100 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

#### **Guarantee**

- 30 year guarantee Structural strength of steel and stainless steel components
- 15 year guarantee Structural failure of steel and stainless steel, for dynamic equipment
- 10 year guarantee Structural failure of high density polyethylene and high pressure laminates components
- 5 year guarantee Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com

# Amount of safe surface corresponding with free fall height:


 10	$\neg$	31	

24,5 m<sup>2</sup>

Data is subject to change without prior notice.

## **Surfaces according to EN 16630:2015**

	Description (mm)	Layer thickness (cm)	Maximum fall height (cm)
Concrete / stone / bituminous surfaces (A, B, C)	-	-	≤100
outer soil layer (A,B,C)	-	-	≤120
Turf (A,B,C)	-	-	≤150
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
wood shavings/cuttings (A, C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand (A,C)	Particle size from 0,2 to	30	≤200
	2 mm	40	≤300
gravel (A,C)	Particle size from 2 to 8	30	≤200
	Taracie Size IIVIII z tu o	40	≤300
attested synthetic (A, B, C)	Tested according	231	



Vinci Group Sp. z o.o. Seminaryjna 9 Street 99-400 Łowicz VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com