#### **Product technical sheet**











14+

< 140 kg


17,2 m2

#### **Product data**

Length	233 cm	
Width	59 cm	
Total height	242 cm	
Age group	14+ years	
Maximum weight of user	140 kg	
Safety zone	17,2 m2	
Free fall height	139 cm	
In accordance with norm EN	16630:2015	
Weight of the heaviest part	32 kg	
Dimensions of the largest part	10x10x350 cm	
Availability of spare parts	YES	
Installation time	1 h	
Color options		

Data is subject to change without prior notice.



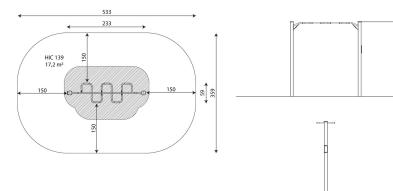









VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991



### **Material specification**



Powder galvanized and powder-coated or stainless steel construction of  $100 \times 100$  mm profile, dulrable end caps on the top of the structure made of plastic,



Stainless steel screws and/or screws covered with plastic caps,



Aluminum exercise instructions plate screwed to HDPE plate, resistant to weather conditions,



Stainless steel bars with a diameter of 38 mm for a comfortable grip during exercises.

#### **Additional information**

- equipment adapted for the disabled; device intended for public outdoor gyms;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 100 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

#### **Guarantee**

- 30 year guarantee Structural strength of steel and stainless steel components
- 15 year guarantee Structural failure of steel and stainless steel, for dynamic equipment
- 10 year guarantee Structural failure of high density polyethylene and high pressure laminates components
- 5 year guarantee Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com

# Amount of safe surface corresponding with free fall height:


HIC 139

17,2 m<sup>2</sup>

Data is subject to change without prior notice.

## **Surfaces according to EN 16630:2015**

	Description (mm)	Layer thickness (cm)	Maximum fall height (cm)
Concrete / stone / bituminous surfaces (A, B, C)	-	-	≤100
outer soil layer (A,B,C)	-	-	≤120
Turf (A,B,C)	-	-	≤150
hark (A.C.)	Particle size from 20 to 80	30	≤200
bark (A,C)		40	≤300
wood shavings/cuttings (A, C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand (A,C)	Particle size from 0,2 to 2 mm	30	≤200
Sanu (A,C)		40	≤300
gravel (A,C)	Particle size from 2 to 8	30	≤200
		40	≤300
attested synthetic (A, B, C)	Tested according to EN 1177		139



**Vinci Group Sp. z o.o.** Seminaryjna 9 Street 99-400 Łowicz VAT: 534-250-14-46

PHONE: +48 42 203 24 99 ext. 26

M: +48 793 404 991



biuro@vinci-play.com info@vinci-play.com www.vinci-play.com